

LED Premium Street Light 50w c/w Photocell NEMA Dusk til Dawn Sensor Flicker Free

\$160.58

7,000lm




50W
Replaces
70W MHL




LED Premium Street Light DIMENSIONS

Performance-Optimized Design & Robust Construction

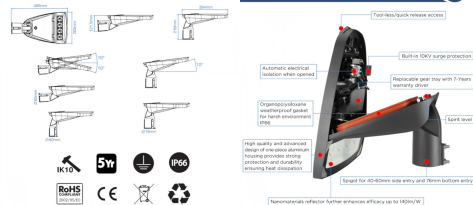

PHOTOCELL ENABLED

FOR UP TO 80% SAVINGS ON ELECTRICITY



DURABLE, ROBUST AND DEPENDABLE

CLASS 1, CLASS 2 AND CLASS 3



24/7 CUSTOMER SUPPORT

5 YEAR WARRANTY

LED Premium Street Light
Slim and elegant aesthetic
Superior efficacy up to 140 lm/W
Wide range of luminaire packages
Self-cleaning Smooth Surface
Tool-Max Access

INSTALLATION INSTRUCTIONS:

1. Remove the photocell sensor cap.
2. Mount the photocell sensor to the wall or ceiling.
3. Mount the street light to the wall or ceiling.
4. Connect the street light to the photocell sensor.
5. Test the street light operation.
6. Replace the photocell sensor cap.

INSTALLATION INSTRUCTIONS:

1. Open the photocell sensor cap.
2. Mount the photocell sensor to the wall or ceiling.
3. Mount the street light to the wall or ceiling.
4. Connect the street light to the photocell sensor.
5. Test the street light operation.
6. Replace the photocell sensor cap.

Free Lighting Design Service

5 YEAR WARRANTY

Unsure of how many lights you require?
Clashes about optical, fire wires and lumens?
Don't worry, our expert lighting designers are here to help.
Enquire about our **FREE** no obligation lighting design service.
Turned around in within just 48 hours.

DARK SKY FRIENDLY



PRODUCT INFORMATION

LED Type	SMD3030 LEDs
Warranty	5 Year
Part L Compliant	Yes
Dimensions	617mm x 212mm x 118mm
Weight	3.85kg
Windage	0.08m ²
Socket Type	Optional 3 pin NEMA Socket
Equivalent to	70 SON

TECHNICAL SPECIFICATIONS

Power Consumption	50W
Input Voltage	100-280V AC
Power Factor	>0.96
Operating Temperature	-20°C to 50°C
L70 Rated Lifetime	+100,000hrs

PRODUCT INFORMATION**TECHNICAL SPECIFICATIONS**

Ingress Protection IP66

LUMEN PERFORMANCE

Luminous Efficiency 140lm/W

Beam Angle 150° x 80°

CRI (Colour Rendering Index) >80Ra

Lumen Output 7,000lm

AVAILABLE OPTIONS

Colour Temperature 3000K (Dark Sky Friendly- 0% ULOR) 4000K

3-Hour Emergency Version No

Built-in Microwave Occupancy Detector No

1-10V Dimmable Available on Request

DALI Dimmable Available on Request

****Fitting Comes inclusive with integral 3-Pin NEMA Socket and Lucy Zodion 70lux Photocell****

Luminaire designed for column/post mounting at heights of 4 - 16m, with a range of sizes across 20W - 240W (2,800-33,000lm), IP66 design for exterior environments, with a low profile, sleek silver anodised aluminum body for harsh weather environments, Premium Street light is for urban applications such as car-parks, pathways and pedestrian areas. PMMA optic lens ensures a high degree of uniformity across a range of spaces and reduced light spillage, thus further enhancing this 140lm/W luminaire to give optimum lux levels through out. Furthermore the Premium Street light is compatible with standard mains photocells. Additional benefits include 100,000 hours maintenance free performance, with no-tools/quick release access to the internal control gear for installation. Unit available with either 60mm or 76mm entry bracket for both bottom & side-entry hence universally compatible. Angle of illumination can be adjusted around 10° for increased spread.

[DOWNLOAD PRODUCT INSTALLATION MANUAL / GUIDE](#)

[DOWNLOAD UKAS LABORATORY TEST DATA & COMPLIANCE CERTIFICATES](#)

[DOWNLOAD UKAS LABORATORY TEST DATA & COMPLIANCE CERTIFICATES](#)

[DOWNLOAD UKAS LABORATORY TEST DATA & COMPLIANCE CERTIFICATES](#)



Unit 2,
Delta Court,
Doncaster,
DN9 3GN
text_phone 03333 444 943
sales@theledstore.co | <https://ledexperts.co.uk/>