

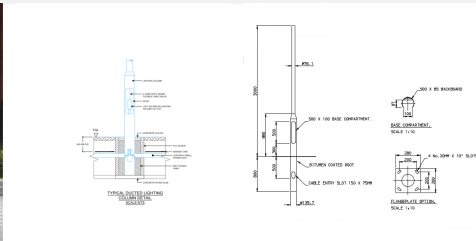


**3m Lamp Post Lighting Column 30W Premium LED Street Light Kit c/w Fuse Cutout and M8 Key (3m Above Ground)**

**£282.84**

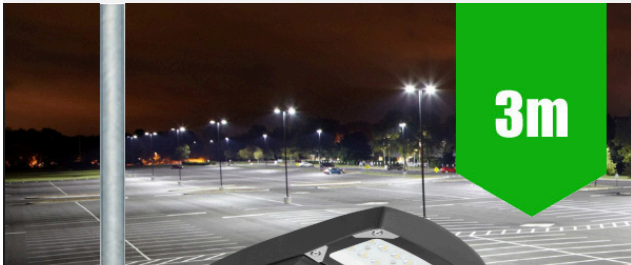

LED Premium Street Light DIMENSIONS

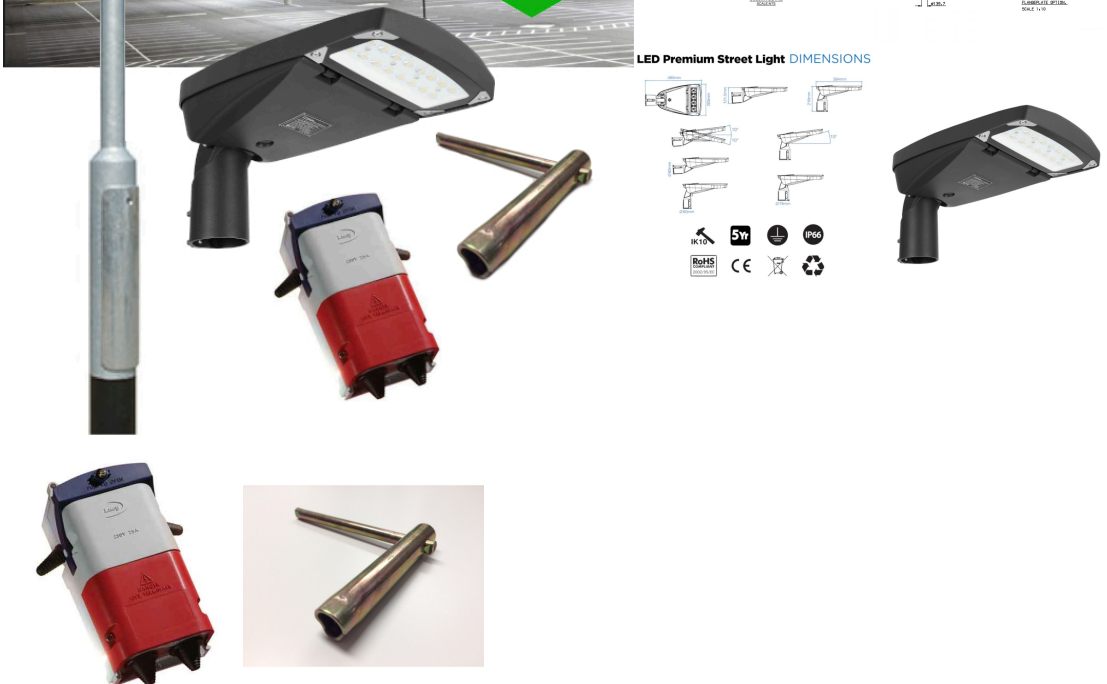

**PRODUCT INFORMATION**

LED Type Lumileds LUXEON® 5050 LEDs

**TECHNICAL SPECIFICATIONS**

Power Consumption 30W  
 Input Voltage 90-305V AC  
 Power Factor >0.96  
 L70 Rated Lifetime +100,000hrs  
 Ingress Protection IP66

**LUMEN PERFORMANCE**

Luminous Efficiency 140lm/W  
 Beam Angle 150° x 80°  
 CRI (Colour Rendering Index) >80Ra  
 Lumen Output 4,200lm

**AVAILABLE OPTIONS**

Colour Temperature Natural White 4000-4500K

Save time and order our complete LED Street Light kit which includes the following components:

3m Steel Galvanised Lamp Post:  
[Root Mounted Option](#)

## [Flange Plated Option](#)

Street Light:

### [30W LED Street Light](#)

Fuse Cutout:

[Single Option](#)

[Twin Option](#)

Column Door Key:

[M8 Column Door Key](#)

The single option is for 1 light per column which is supplied with the inbuilt 76mm bracket.

The twin option is for 2 lights per column which is supplied with a twin projection bracket.

If adding on a photocell you must select either the 'Single' option for 1 light per column, or the 'Twin' Option for 2 lights per column.

The root mounted column is 3m above ground with a 0.8m ground root - 3.8m total length.

The flange plated column is 3m above ground with a 280mm x 280mm Base Plate -3m total length.

If unsure about the specification of an item in this kit, please see individual links to each item clicking the links above.

### **PLEASE NOTE.**

**We are unable to modify these kits in any way; they are heavily discounted to be sold as a complete kit.**













**We do not warrant that the goods will be fit for any specific purpose.**

**Please check that the specification is suitable for the proposed application.**












**If you need to light a certain area to a certain lux level, please ask us about our free lighting design service.**

[DOWNLOAD TYPICAL LAMP POST / LIGHTING COLUMN INSTALLATION - CONCRETE ROOT MOUNTED POST\\*](#)

NOTE\* - The above is only a typical detail & is subject to ground conditions & head weight / windage load - we advise this is checked prior to installation

												
	Height Above Ground (m)	Root (Below Ground)	Base Diameter (mm)	Shaft Diameter (mm)	Base Height (mm)	Shaft Height (mm)	Max Head Weight kg/m <sup>2</sup>	Weight (kg)	Min Concrete Diameter* (mm)			
LST-3MCOL	3m	800mm	Ø140mm	Ø76mm	1250mm	1690mm	40kg / 0.4	27kg	950mm			
LST-4MCOL	4m	800mm	Ø140mm	Ø76mm	1250mm	2690mm	40kg / 0.4	32kg	950mm			
LST-5MCOL	5m	800mm	Ø140mm	Ø76mm	1250mm	3675mm	40kg / 0.4	37kg	525mm			
LST-6MCOL	6m	1000mm	Ø140mm	Ø76mm	1250mm	4660mm	40kg / 0.4	47kg	269mm			
LST-8MCOL	8m	1200mm	Ø168mm	Ø89mm	1250mm	6630mm	30kg / 0.3	80kg	262mm			
LST-10MCOL	10m	1500mm	Ø168mm	Ø114mm	1250mm	8600mm	30kg / 0.28	120kg	239mm			
LST-12MCOL	12m	1700mm	Ø194mm	Ø114mm	1250mm	9840mm	40kg / 0.33	190kg	262mm			

\*Root concrete diameter based on poor soil or better, minimum 230kN/m<sup>2</sup> per m

											
	Height Above Ground (m)	Flange Plate Size (mm)	Base Diameter (mm)	Shaft Diameter (mm)	Base Height (mm)	Shaft Height (mm)	Max Head Weight kg/m <sup>2</sup>	Weight (kg)	Concrete Dimensions* (mm)		
LST-3MCOLFP	3m	280mm x 280mm	Ø140mm	Ø76mm	1250mm	1690mm	40kg / 0.4	30kg	700 x 700 x 800		
LST-4MCOLFP	4m	280mm x 280mm	Ø140mm	Ø76mm	1250mm	2690mm	40kg / 0.4	32kg	700 x 700 x 800		
LST-5MCOLFP	5m	280mm x 280mm	Ø140mm	Ø76mm	1250mm	3675mm	40kg / 0.4	39kg	750 x 750 x 800		
LST-6MCOLFP	6m	280mm x 280mm	Ø140mm	Ø76mm	1250mm	4660mm	40kg / 0.4	47kg	750 x 750 x 800		
LST-8MCOLFP	8m	320mm x 320mm	Ø168mm	Ø89mm	1250mm	6630mm	30kg / 0.3	89kg	850 x 850 x 900		

\*Concrete dimensions based on a minimum ground bearing pressure of 150kN/m<sup>2</sup> per m (Width x Width x Height)