



4ft LED Strip Lights - 1200mm Non-corrosive IP65 Twin/120cm [1.2m] Vapour-proof / Weatherproof Batten

\$24.89

5,600lm

40W
4FT
1200mm

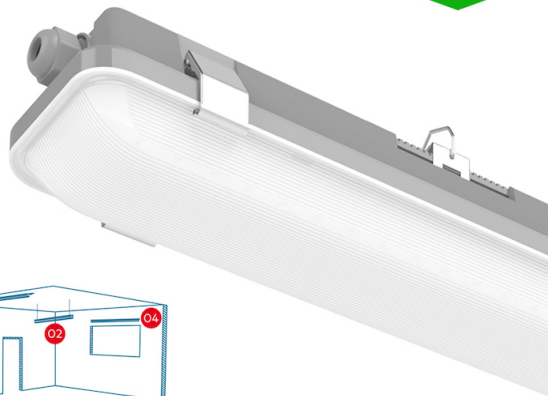

LED VAPOUR-PROOF FITTING
IP65 Water & Dust Proof

SELF-TEST EMERGENCY WATERPROOF FITTINGS
3.2V 3600mAh Lithium Battery
Emergency Standby: 3hours

SUITABLE FOR MULTIPLE APPLICATIONS

- Parking Areas
- Loading Bays
- Garages & Caravan Areas
- Service Rooms
- Workshops

DURABLE & RELIABLE CONSTRUCTION


STAINLESS STEEL CLIPS & PC BODY
FROSTED DIFFUSER allows ultra-soft, diffused light providing single and uniform lighting

Stainless Steel Straps / C/W Suspension Hooks


IP65 WATER & DUST PROOF
Can be used in most areas for parking lots, workshops, and other environment constantly exposed to moisture and dust.

IP65 LED Vapour-proof Fitting
Easy Installation and Maintenance

LED NON-CORROSIVE FITTING
4FT/1200mm 40W 3600LM



VERSATILE MOUNTING OPTIONS
Perfect Placement for Fluorescence



PRODUCT INFORMATION

LED Type	SMD2835 LEDs
Warranty	5 Year
Part L Compliant	Yes
Dimensions	1240mm x 100mm x 84mm
Weight	3.2kg
Equivalent to	1200mm Twin T8

TECHNICAL SPECIFICATIONS

Power Consumption	40W
Input Voltage	220-280V AC
Power Factor	>0.95
Operating Temperature	-20°C to 40°C
L70 Rated Lifetime	+50,000hrs
Ingress Protection	IP65
Emergency Battery Type	LiFePO4 3300Mah Lithium Ion c/w Self Test

LUMEN PERFORMANCE

Luminous Efficiency	120lm/W
Beam Angle	120°
CRI (Colour Rendering Index)	>75
Lumen Output	5600lm

AVAILABLE OPTIONS

Colour Temperature	Natural White 4000K
--------------------	---------------------

PRODUCT INFORMATION

TECHNICAL SPECIFICATIONS

LUMEN PERFORMANCE

AVAILABLE OPTIONS

3-Hour Emergency Version Yes

DMX 512 Compatible No

4ft / 1200mm [1.2m] Twin LED Strip Light - Osram® Driver

LiFePO4 Lithium Ion Emergency Battery - Environmentally friendly, fully recyclable

A revolutionary LED replacement to replace complete non-corrosive fluorescent tube fittings in 1200mm / 4ft twin variety - 40W / 5,600lm. With direct illumination technology, prove advantageous over both conventional fluorescents and LED tube counterparts in terms of industry leading efficacy: 120lm/W. Hence an L70 rated lifetime of 30,000+ hour and simple installation, this unit has proved to be the specifiers number one choice being deemed truly 'fit-and-forget'. Wide demand throughout commercial and industrial sectors, namely workshops, high-humidity areas and even outbuildings use being IP65 weather-proof. Toughened polycarbonate diffuser for uniform lumen output with robust PC base. Unit comes complete with stainless steel side clips, detachable hinged tray for ease of install, fixing brackets and M20 x 1.5 IP65 cable gland. Options of 4ft/1200mm, 5ft/1500mm & 6ft/1800mm. M3/NM3 emergency version includes internal built in 3-hour maintained emergency pack.