

1200W Asymmetric LED Flood Sports Area Light for Tennis Court, Football, Rugby Pitch, Horse Menage, Golf, Stadium, Arena

~~\$1,573.47~~ **\$1,255.66**

**LED SPORTS
MAST LIGHT
300W - 1500W**



LIGHTING PROJECT FLEXIBILITY
Perfect for hire & replacement

EXCELLENT SPILL LIGHT CONTROL
Control Unwanted Light

Optional Frost Year
Control frosty nights with the IP65 technology and replaceable frost protection film. The film is made of clear polycarbonate (PC) and is easy to replace.


LED Flood Sports Light DIMENSIONS

Free Lighting Design Service

Measure of how many lights you require? Click here about sports, law tennis and general Sport lighting. Our expert lighting designers are here to help.

Speak to our FREE no obligation lighting design service - just send over drawing and your requirement - turned around in just 48 hours.

UK CA RoHS RECYCLED ENERGY STAR IP65 IK09 5Y

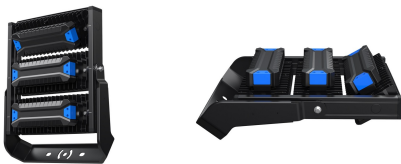

1200W Asymmetric LED Flood Sports Area Light for Tennis Court, Football, Rugby Pitch, Horse Menage, Golf, Stadium, Arena

LED Series Heavy Duty Flood Lighting - Stadium / High-Mast Lighting - 900W (135,000lm) - IP65 - Philips Lumileds® LEDs (770mm x 565mm x 325mm) - NW (4000K)

Other benefits include minimised attraction to nocturnal wildlife due to non ultraviolet light, high light output even in cold temperatures and a range of lumen packages 14,000-220,000lm to suit different environments. Ideal for projects such as sports pitches, tennis courts, horse arenas/menages and industrial applications. The unit features a choice of either an adjustable mounting bracket.

PRODUCT INFORMATION

LED Type	Philips Lumileds SMD LEDs
Warranty	5 Year
Part L Compliant	Yes
Dimensions	770mm x 565mm x 325mm
Weight	24kg
Windage	0.43m ²
Equivalent to	1kw SON

TECHNICAL SPECIFICATIONS

Power Consumption	1200W
-------------------	-------

PRODUCT INFORMATION

TECHNICAL SPECIFICATIONS

Input Voltage	90-305V AC
Power Factor	>0.9
Operating Temperature	-25°C to 45°C
L70 Rated Lifetime	+100,000hours
Ingress Protection	IP66
LUMEN PERFORMANCE	
Luminous Efficiency	150lm/W
Beam Angle	Symmetric 25° X 25° / 45° X 45°
CRI (Colour Rendering Index)	>80Ra
Lumen Output	180,000lm
AVAILABLE OPTIONS	
Colour Temperature	Natural White 4000K
3-Hour Emergency Version	No
Built-in Microwave Occupancy Detector	No
1-10V Dimmable	Available Option
DALI Dimmable	Available Option