Technical Information

⊕ –⊏ 3rd Angle
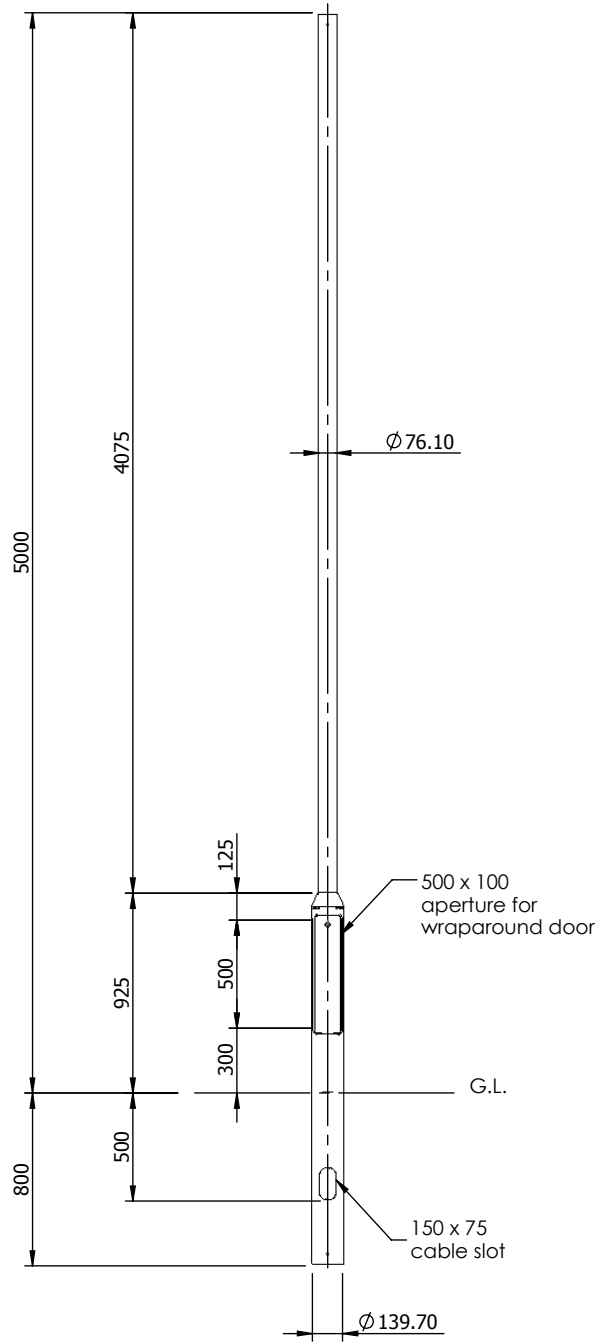
Ø 76.10

4075

5000

* Maximum design head load based on wind
  loading region with orientation of bracket/
  luminaire(s) being on same plane as door

Maximum Loading including Bracket		
Wind Loading Region	Terrain Catagory	Weight/Area
Extra Light	II	75kg/0.75m²
	III	85kg/0.90m²
Light	II	70kg/0.65m²
	III	80kg/0.78m²
Medium	II	60kg/0.60m²
	III	73kg/0.72m²
Heavy	II	50kg/0.55m²
	III	65kg/0.66m²
Extra Heavy	II	45kg/0.43m²
	III	53kg/0.52m²

125

925

500

300

500

800

500 x 100
aperture for
wraparound door

G.L.

150 x 75
cable slot

Ø 139.70

2013 © Copyright

SEDNA
lighting

Revisions		
Rev.	Description	Date
1	Loading Table Added	4/12/13

Title
5metre tubular post top column

002571 & 002574

Drg No.   28346-1

Scale:1:35
Sheet 1 of 1

Drawn By: MJB | Chk'd: MB

Ref.   5M76MM

Contract:

Customer: | Date: 4/12/2013

Notes

All dimensions in millimetres unless stated otherwise.

When Multiple views are shown 3rd Angle Projection
is assumed.