


**Suspended Linear LED Light 1200mm/4ft - Silver Anodised Aluminum (4,500lm)
51W Flicker Free**

~~\$100.10~~ **\$90.09**

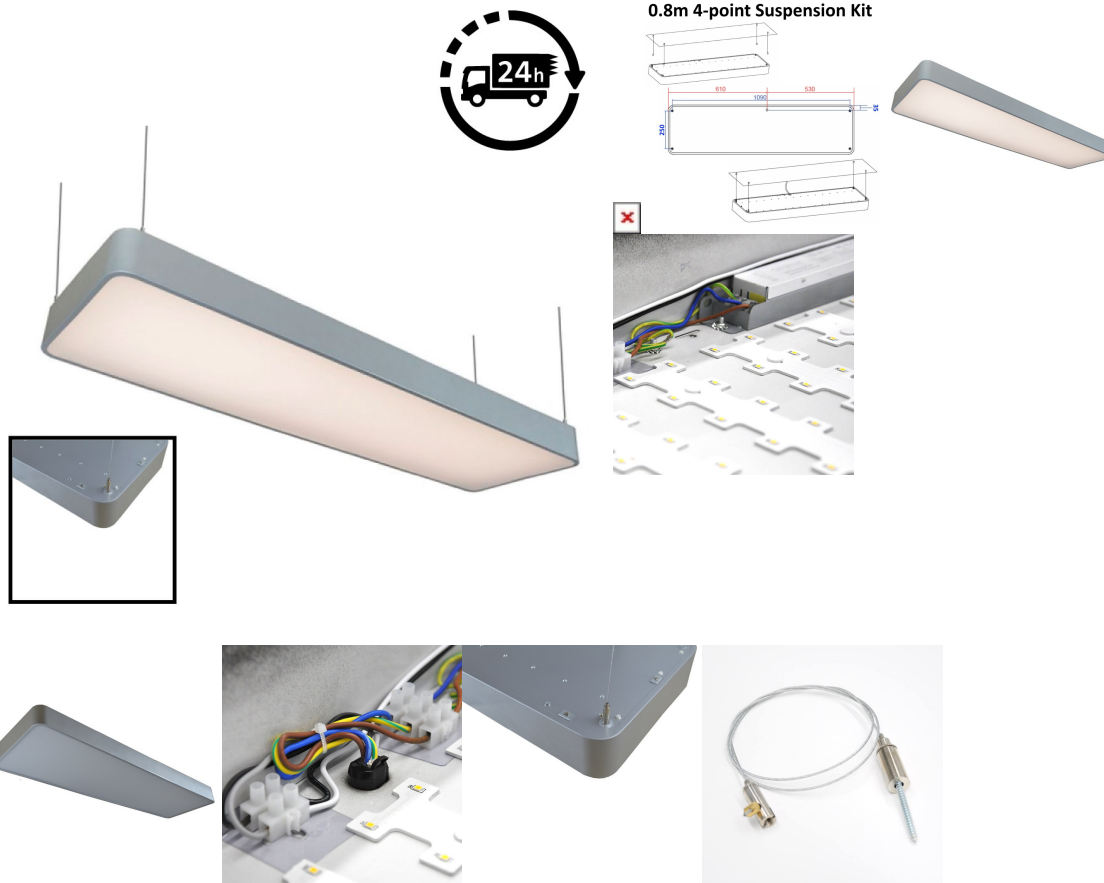

1200mm / 4ft 51W Suspended Light for office, public open spaces and retail with high lumen output of 4500 lumens in Natural White 4000-4500K. Modern minimalist interior design highly suited by suspended luminaire. Finished in a choice of colours: stylish silver aluminum housing, enclosing an Frosted diffuser for subtle light output suiting a wide range of modern commercial and institutional applications, including hallways, retail & conference rooms. 1200mm linear design with a superior lumen output up to 4,500lm, for ample lux levels across a range of environments. High CRI combined with stylish design make this unit perfectly suited to retail applications. Further options of dimmable: DALI and 1-10V, as well as built-in microwave sensor (-MI) for occupancy detection, or built- in PIR sensor (-PIR) for occupancy detection and daylight dimming functionality. 3-hour emergency version available with self-test and LED indicator light.

PRODUCT INFORMATION

| | |
|------------------|-----------------------|
| LED Type | SMD2835 LEDs |
| Warranty | 5 Year |
| Part L Compliant | Yes |
| Dimensions | 1200mm x 320mm x 80mm |
| Weight | 5.5kg |
| Equivalent to | 2 x 36W T8 |

TECHNICAL SPECIFICATIONS

| | |
|-----------------------|---------------|
| Power Consumption | 51W |
| Input Voltage | 110-280V AC |
| Power Factor | >0.95 |
| Operating Temperature | -20°C to 50°C |
| L70 Rated Lifetime | +45,000hrs |

PRODUCT INFORMATION

TECHNICAL SPECIFICATIONS

| | |
|---------------------------------------|----------------------------|
| Ingress Protection | IP21 |
| Emergency Battery Type | YUASA® 12V 1300mAh NiCd |
| LUMEN PERFORMANCE | |
| Luminous Efficiency | 90lm/W |
| Beam Angle | 120° |
| CRI (Colour Rendering Index) | >80Ra |
| Lumen Output | 4,500lm |
| AVAILABLE OPTIONS | |
| Colour Temperature | Natural White (4000-4500K) |
| 3-Hour Emergency Version | Available Variant |
| Built-in Microwave Occupancy Detector | Available Variant |
| 1-10V Dimmable | Available Variant |
| DALI Dimmable | Available Variant |
| DMX 512 Compatible | No |